

# FX Range

for supporting pipe work, cable trays and small outdoor condensing units




100% UK Manufacture  
100% UK Sourced Materials



The 7 feet of the Standard FX range are a practical and versatile support solution for pipe work and cable trays. They can also be used for smaller outdoor condensing units or air source heat pump installations


The feet can have either a 41mm x 21mm 'glued' in' pre galvanised steel channel or our new 'moulded in' aluminium t-bar channel, which is recessed into the top face allowing you to use standard strut fixings to secure your services to the feet

Our FX Range of products are made from Recycled SBR Rubber, making them ECO friendly. They also have the added advantage of vibration & and noise absorption which makes them the ideal product for roof or ground level installations

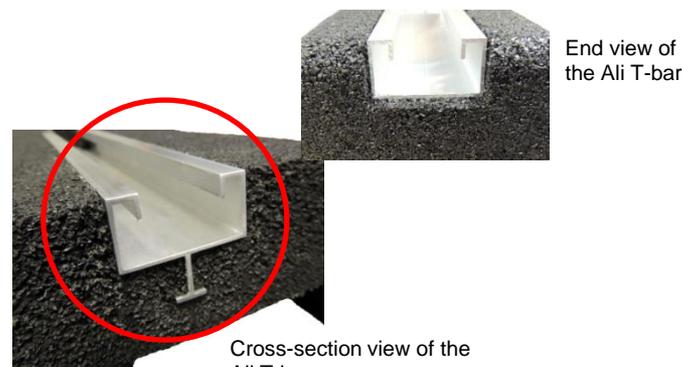

The T-bars are even more eco friendly as the need for adhesive to hold the channel in place has been completely eliminated

Product Code	Model	Height (mm)	Width (mm)		Length (mm)	Max. Loading per foot (kg)	FX Weight (kg)	
			A	B			C	STEEL
COMBI 07	FX 250	100	183	250	160	2.6	2.5	
COMBI 08	FX 400	100	183	400	240	4.2	4.3	
COMBI 09	FX 500	80	160	520	400	4.6	4.3	
COMBI 11	FX 600	100	225	600	450	8.7	8.1	
COMBI 13	FX 1000	100	183	1000	645	12.9	11.4	
COMBI 14	FX 250 Low	50	132	250	160	1.4	1.1	
COMBI 15	FX 400 Low	50	132	400	240	2.5	2.1	

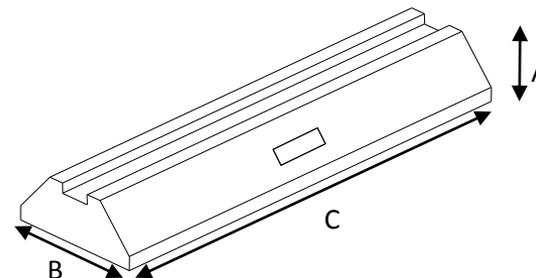

**MATERIAL SPECIFICATION**  
 The rubber is milled, sieved & graded Styrene Butadiene rubber (Black SBR) in reclaimed truck/lorry tyre shred & granular form. Bound together using a 8% ratio of moisture curing Polyurethane Pre-Polymer  
 UV Resistant Recycled Rubber  
 Working Temperature Range: -35°C to +80°C  
 All dimensions +/- 2mm. Weight per unit +/- 3%